




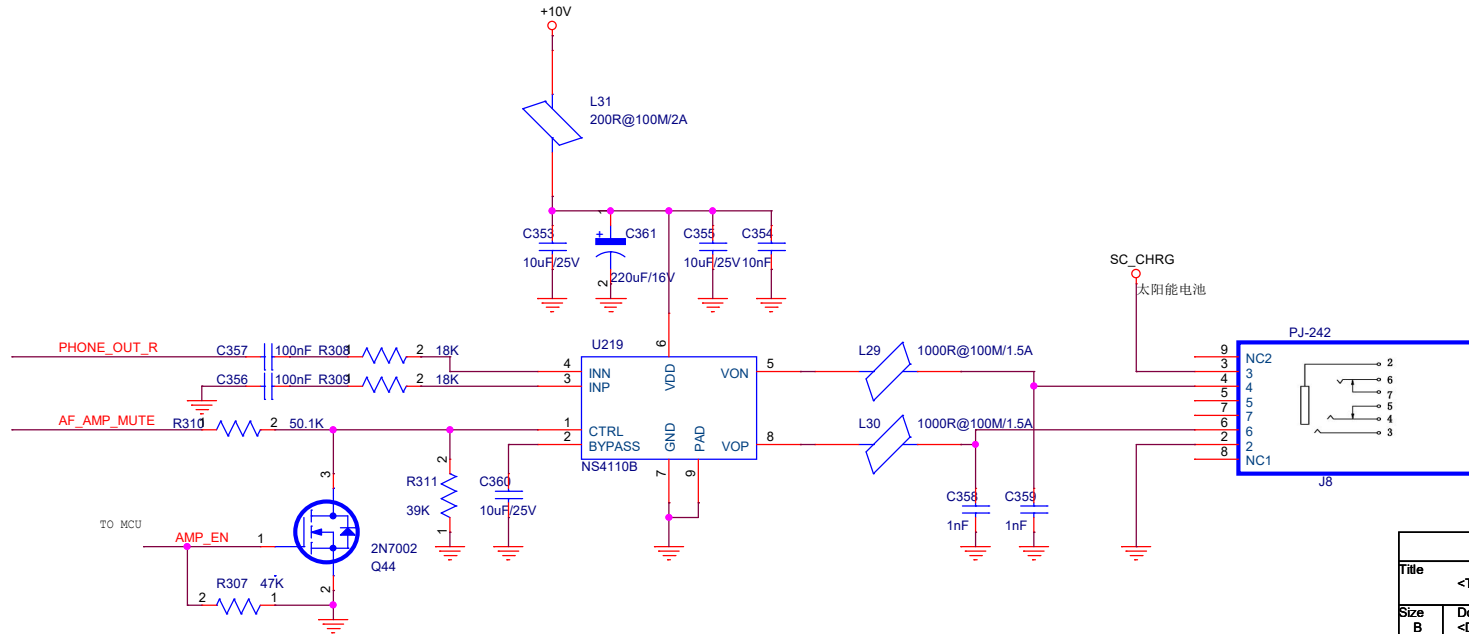

CTRL脚电压为 2.0V-5.0V, 芯片进入 D 类工作模式,  
0.9-1.5V 时芯片进入 AB 类工作模式, 0.5V 以下时  
芯片关断

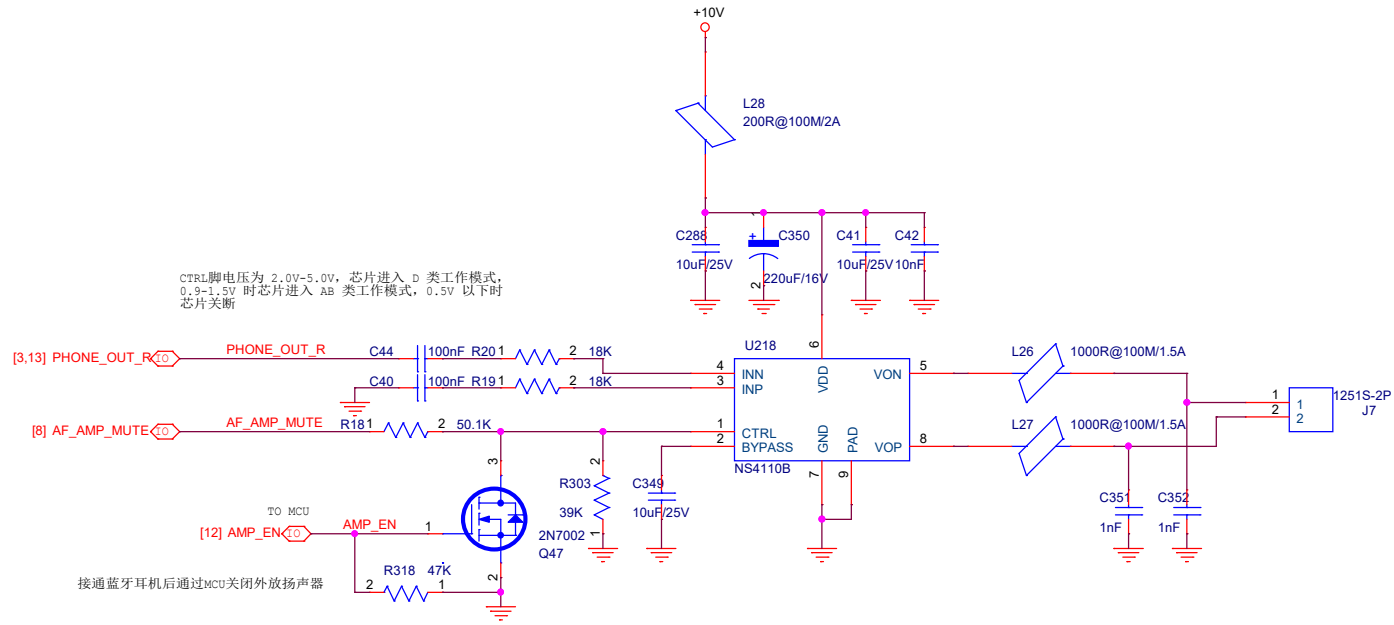







Title			<Title>
Size	Document Number		Rev
B	<Doc>		<RevCode>
Date:	Sunday, April 14, 2024	Sheet	2 of 16

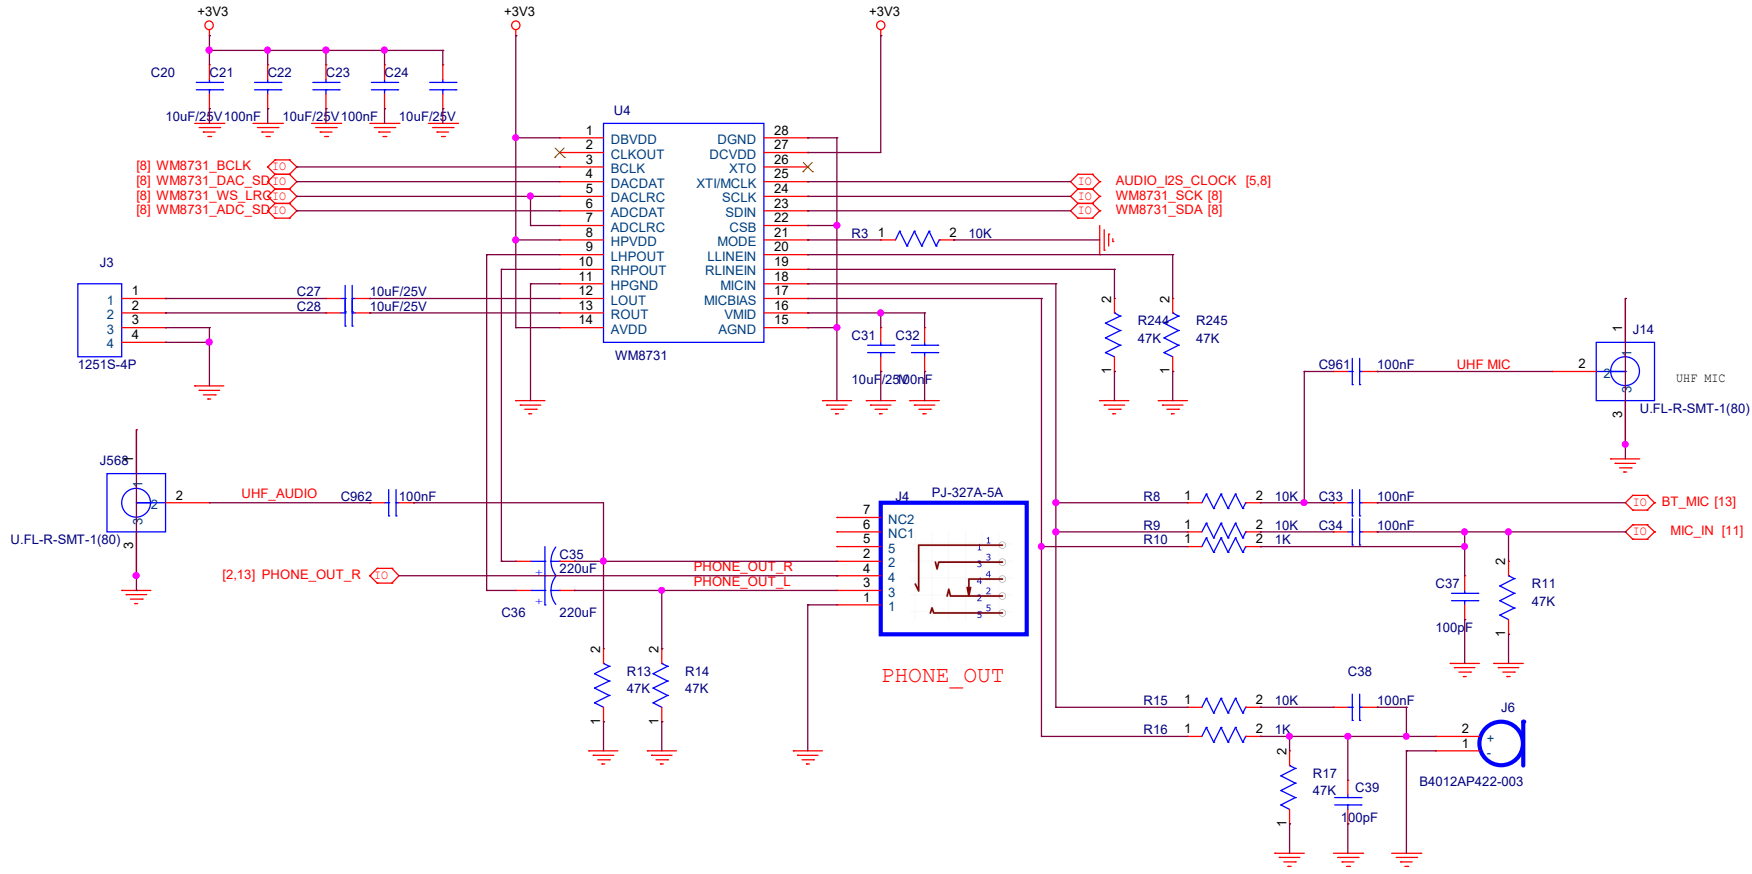

Title <Title>				
Size B	Document Number <Doc>			Rev <Rev Code>
Date:	Sunday, April 14, 2024		Sheet 3 of 16	



<RevCode>

MB板接口






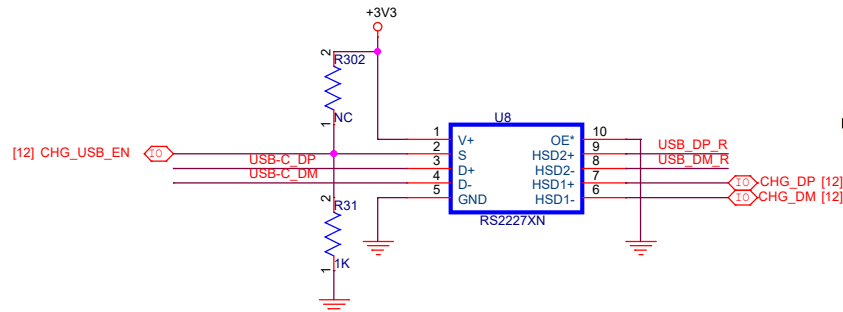
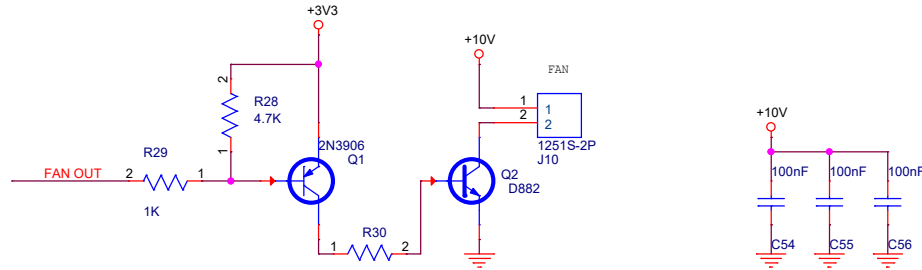
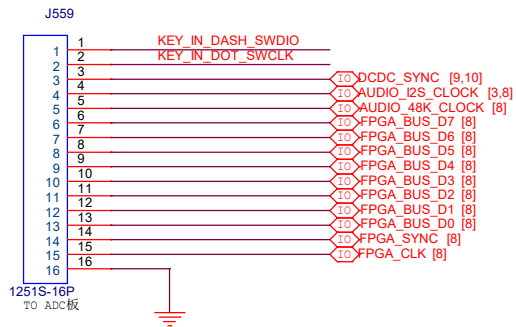
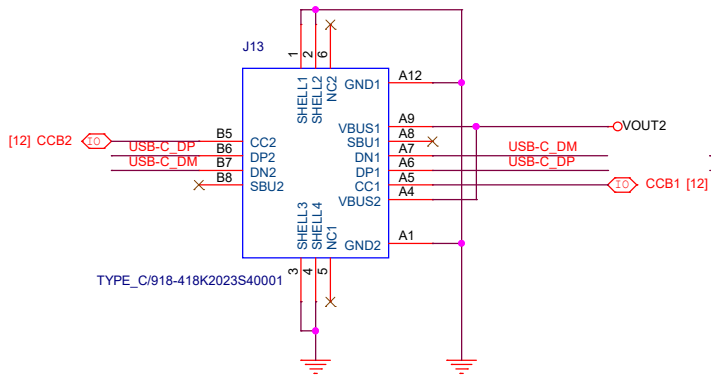
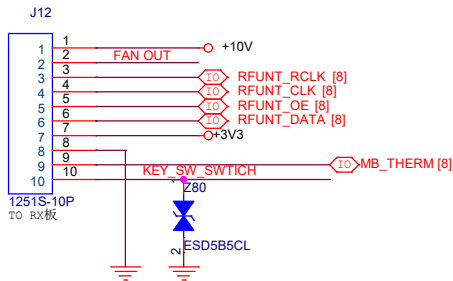
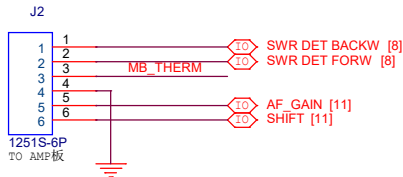


FUNCTION TABLE





OE	S	HSD1+, HSD1-	HSD2+, HSD2-
0	0	ON	OFF
0	1	OFF	ON
1	X	OFF	OFF

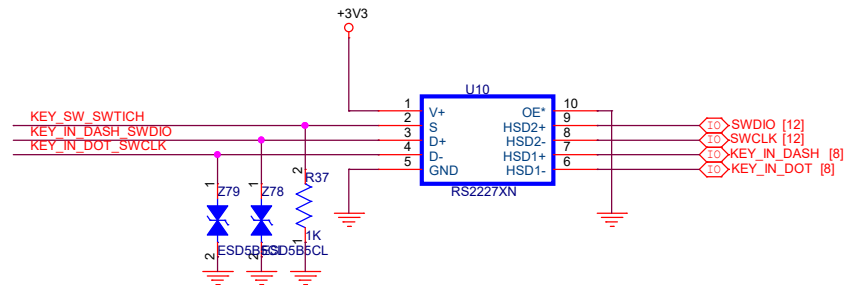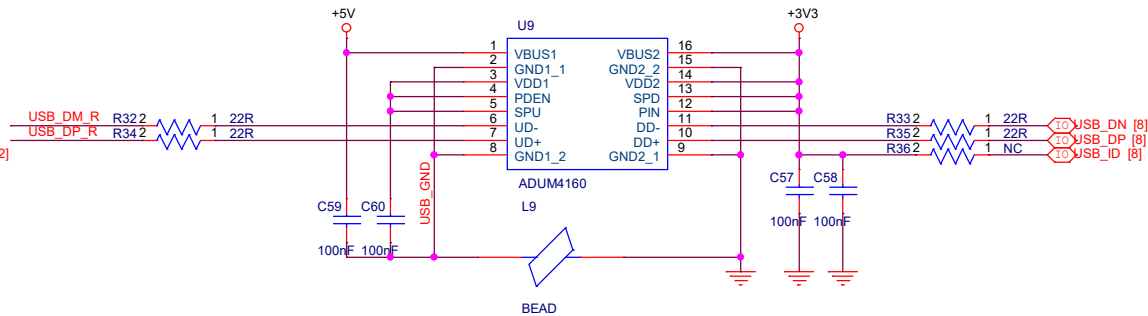


Title		<Title>
Size	Document Number	Rev
B	<Doc>	<RevCode>
Date:	Sunday, April 14, 2024	Sheet 5 of 16

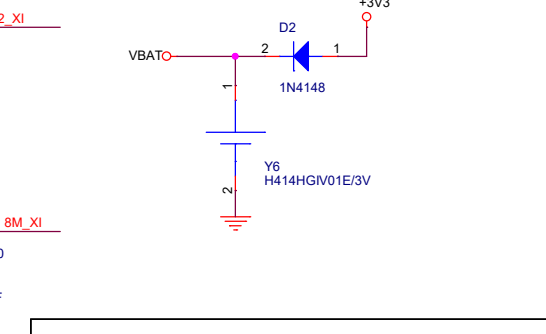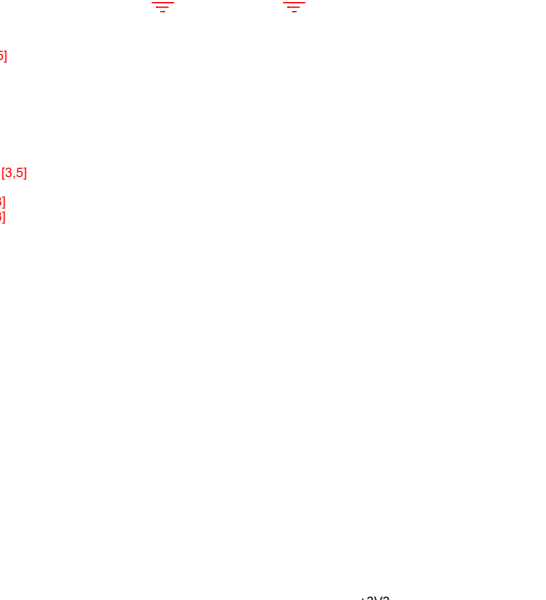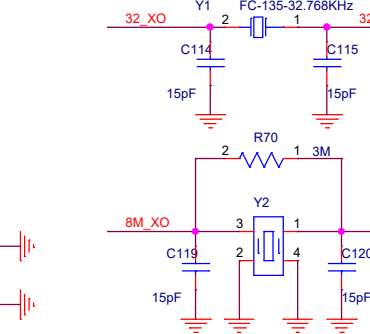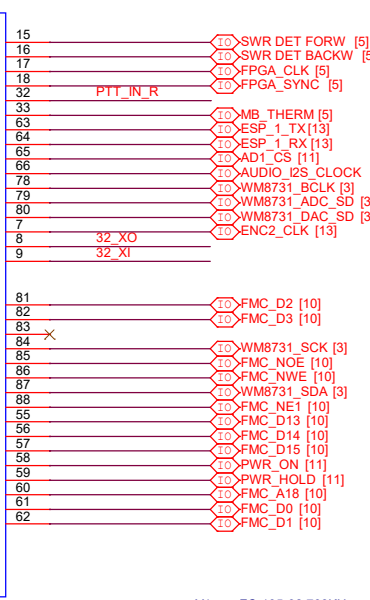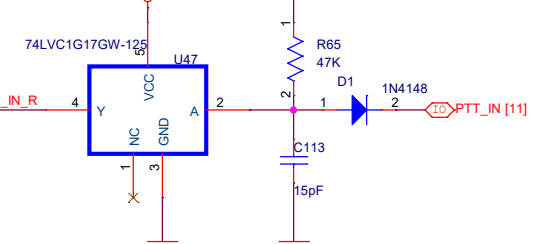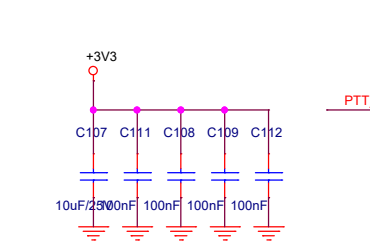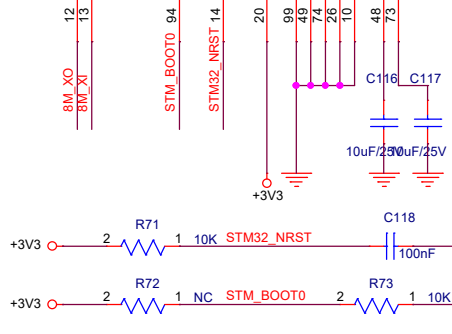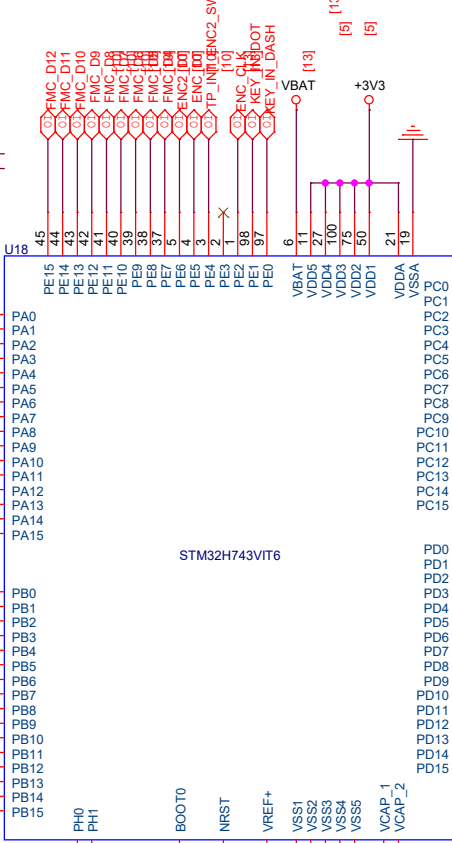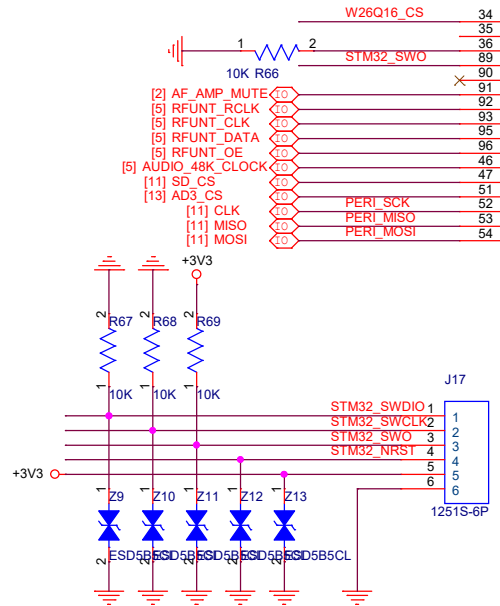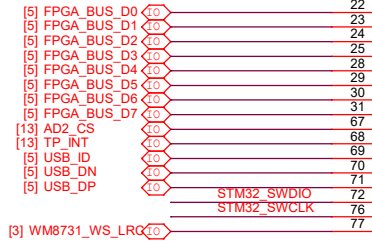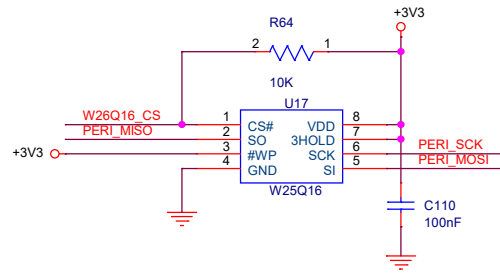


Title		<Title>
Size	Document Number	Rev
B	<Doc>	<RevCode>
Date:	Sunday, April 14, 2024	Sheet 8 of 16

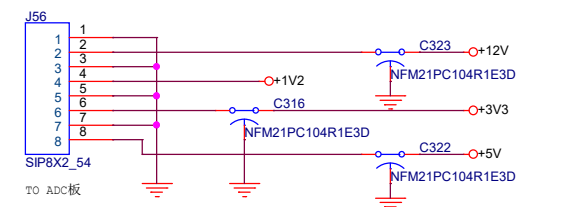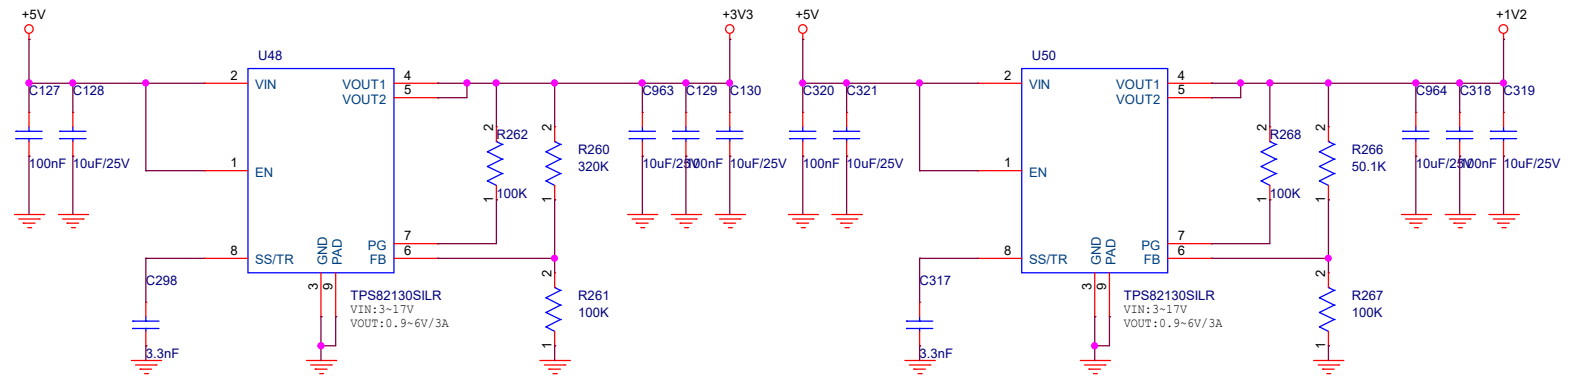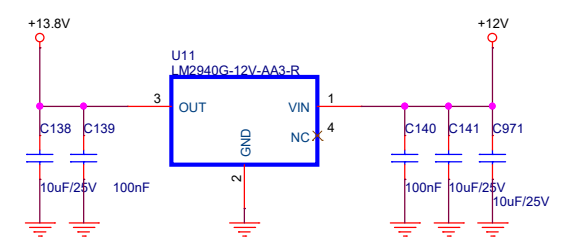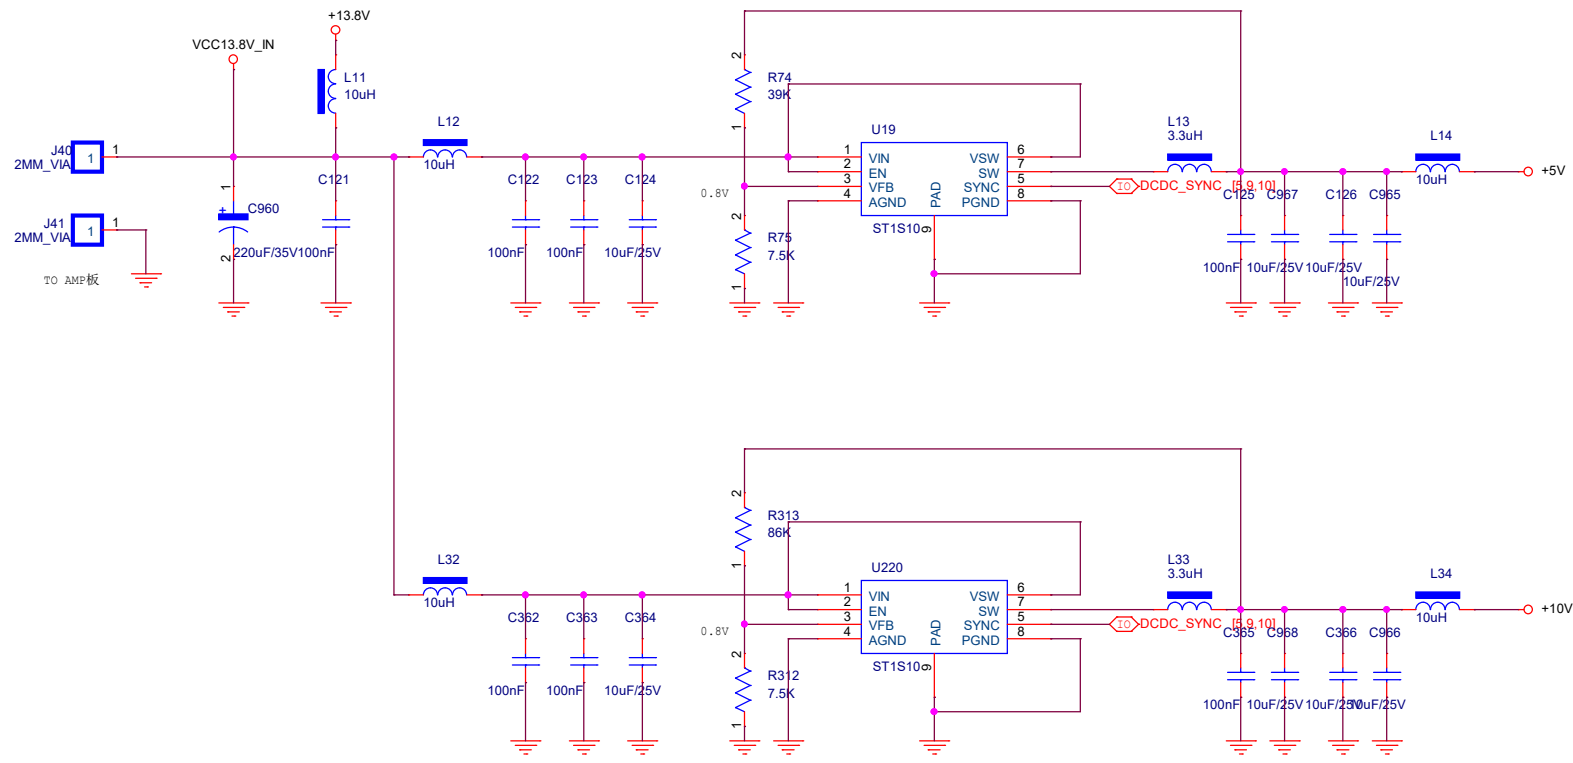


Title		<Title>
Size	Document Number	Rev
B	<Doc>	<RevCode>
Date:	Sunday, April 14, 2024	Sheet 9 of 16

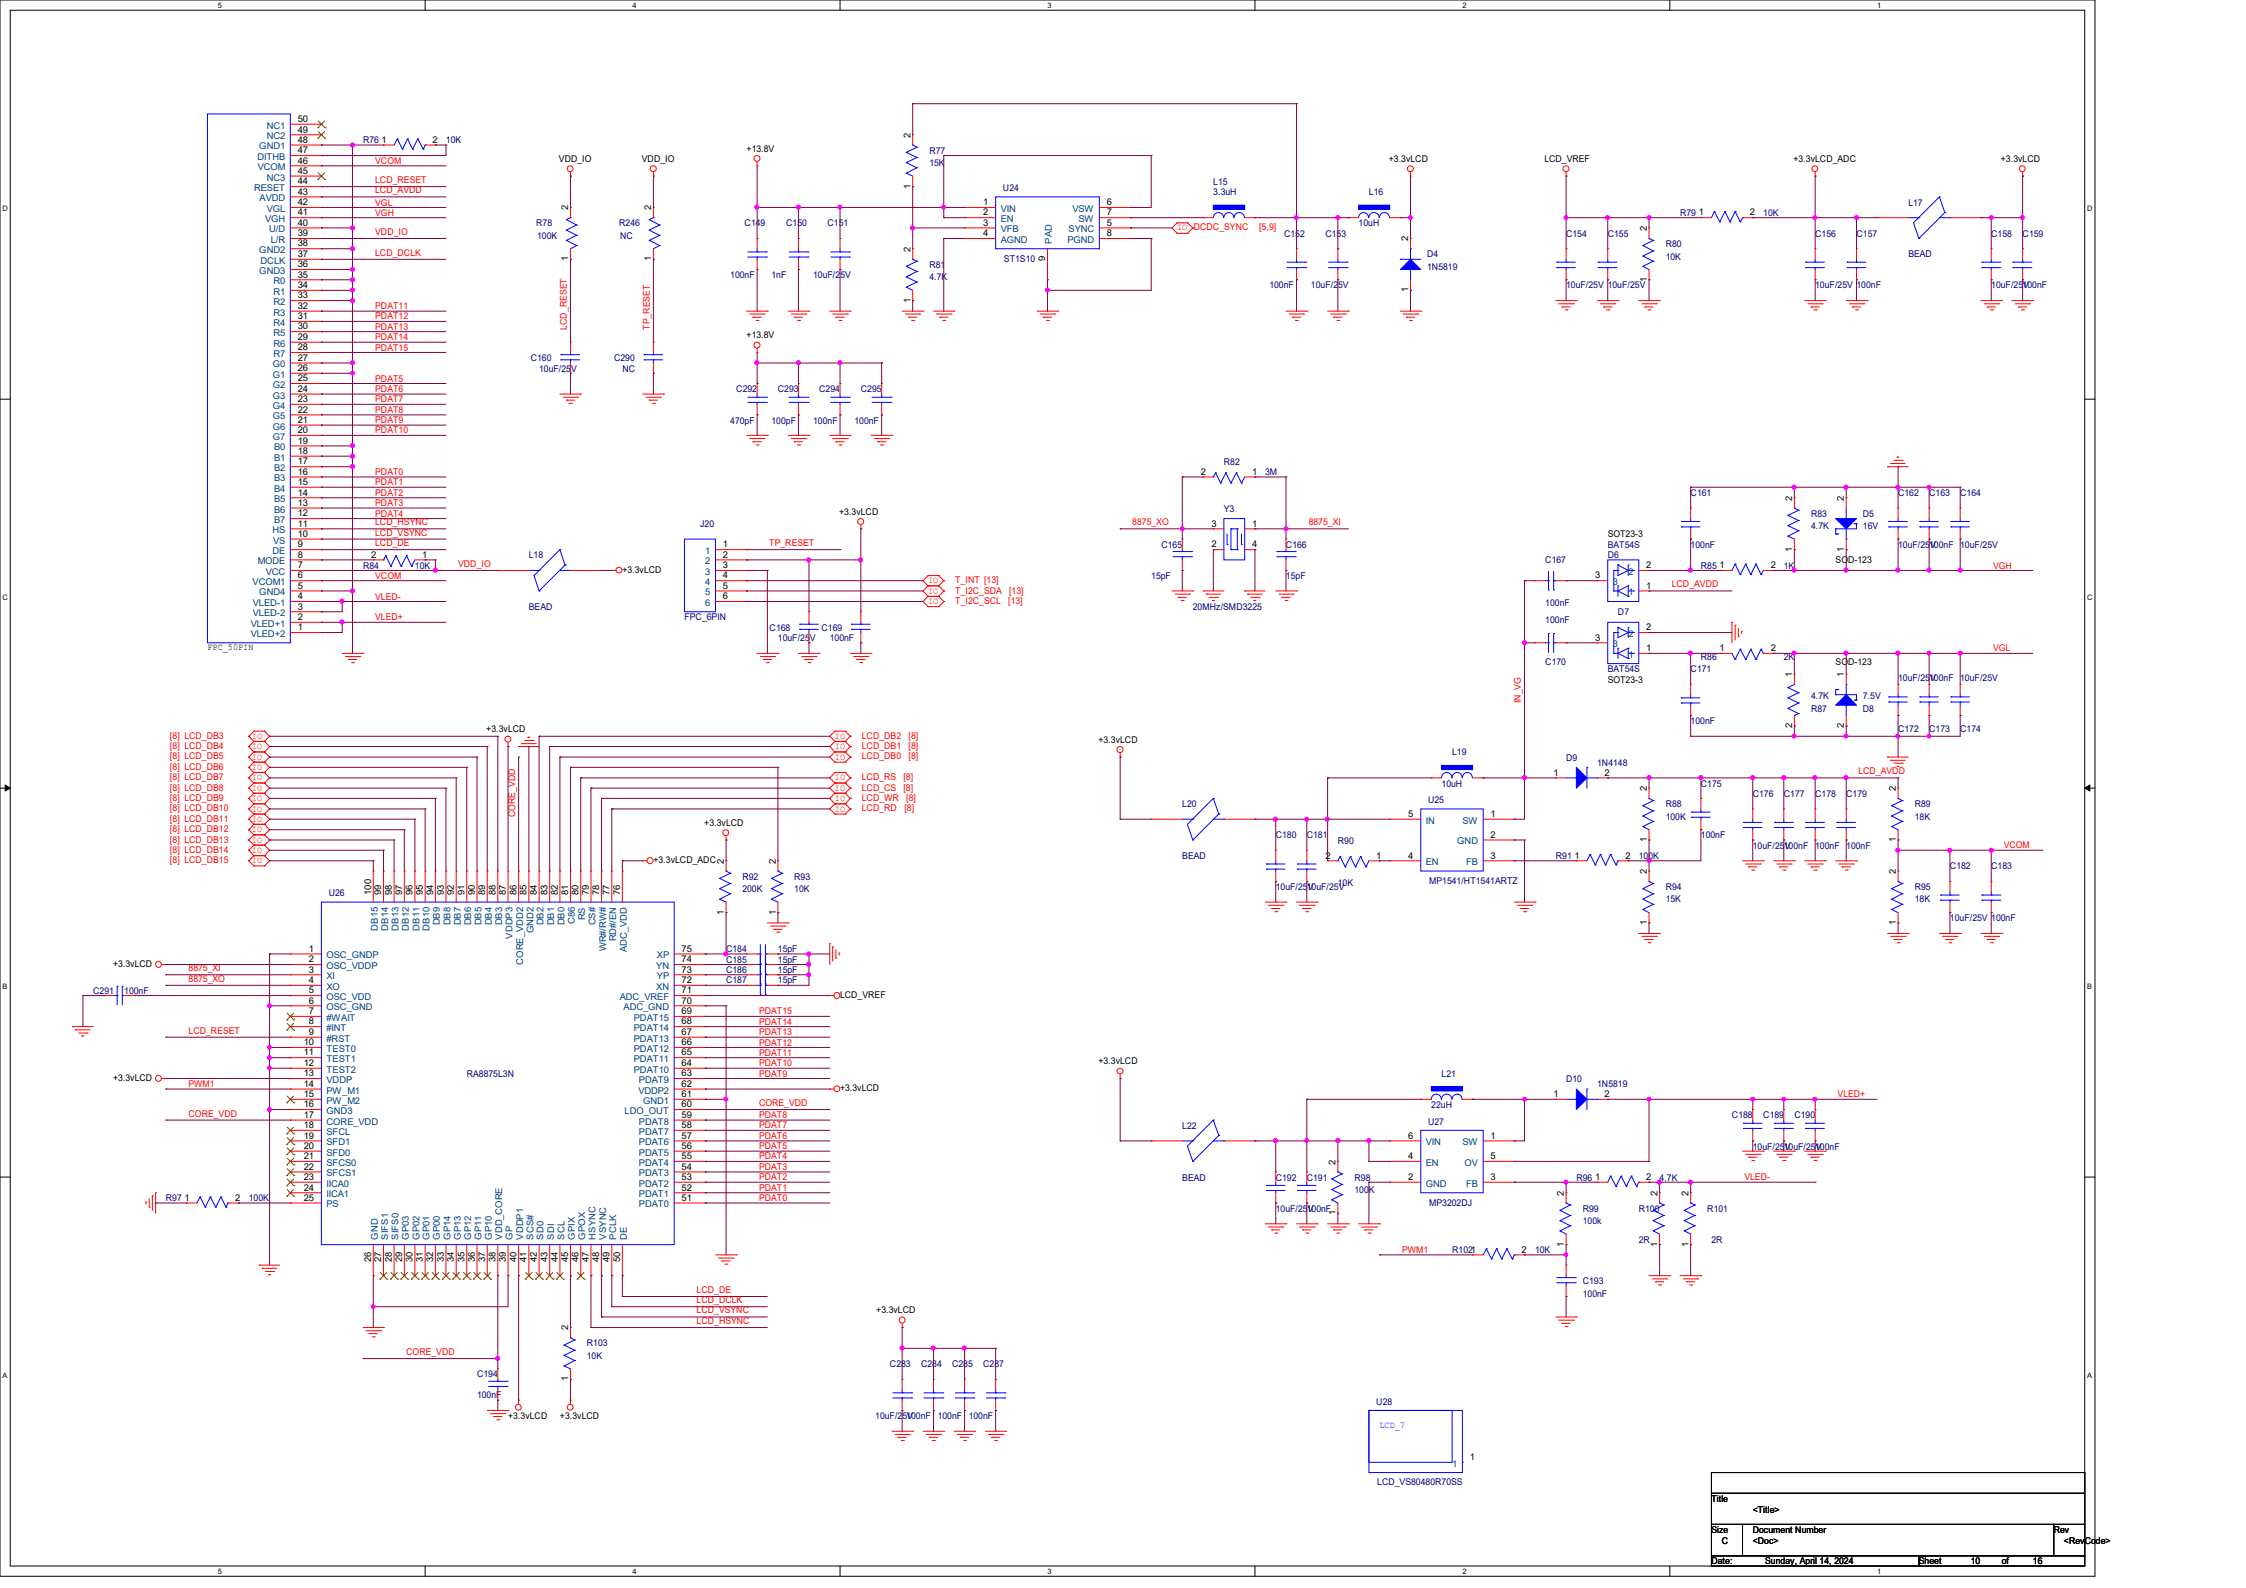

Title		<Title>	Rev
Size	C	Document Number	
Date	Sunday, April 14, 2024		Sheet 10 of 15

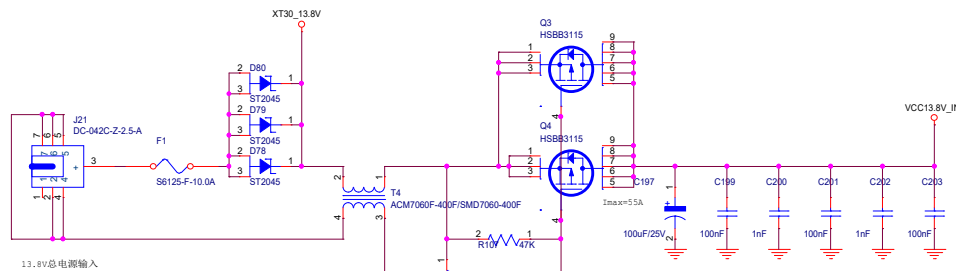


[8] CPU PW ON






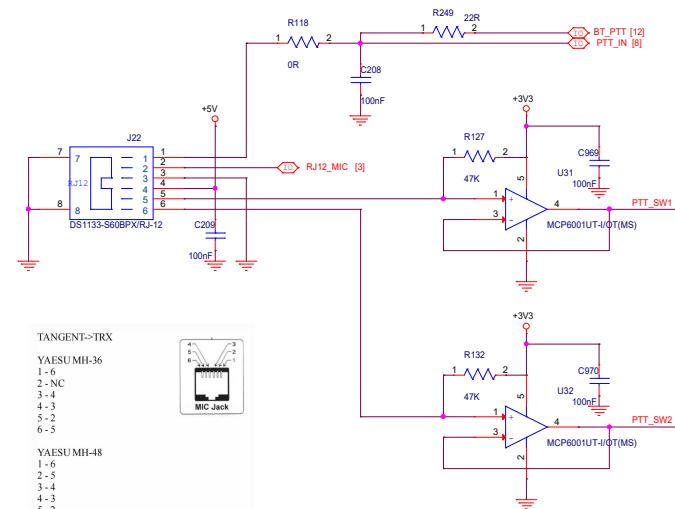


---



Title			
<Title>			
Size	Document Number	Rev	
C	<Doc>	<Rev Code>	
Date:	Sunday, April 14, 2024	Sheet	11 of 16



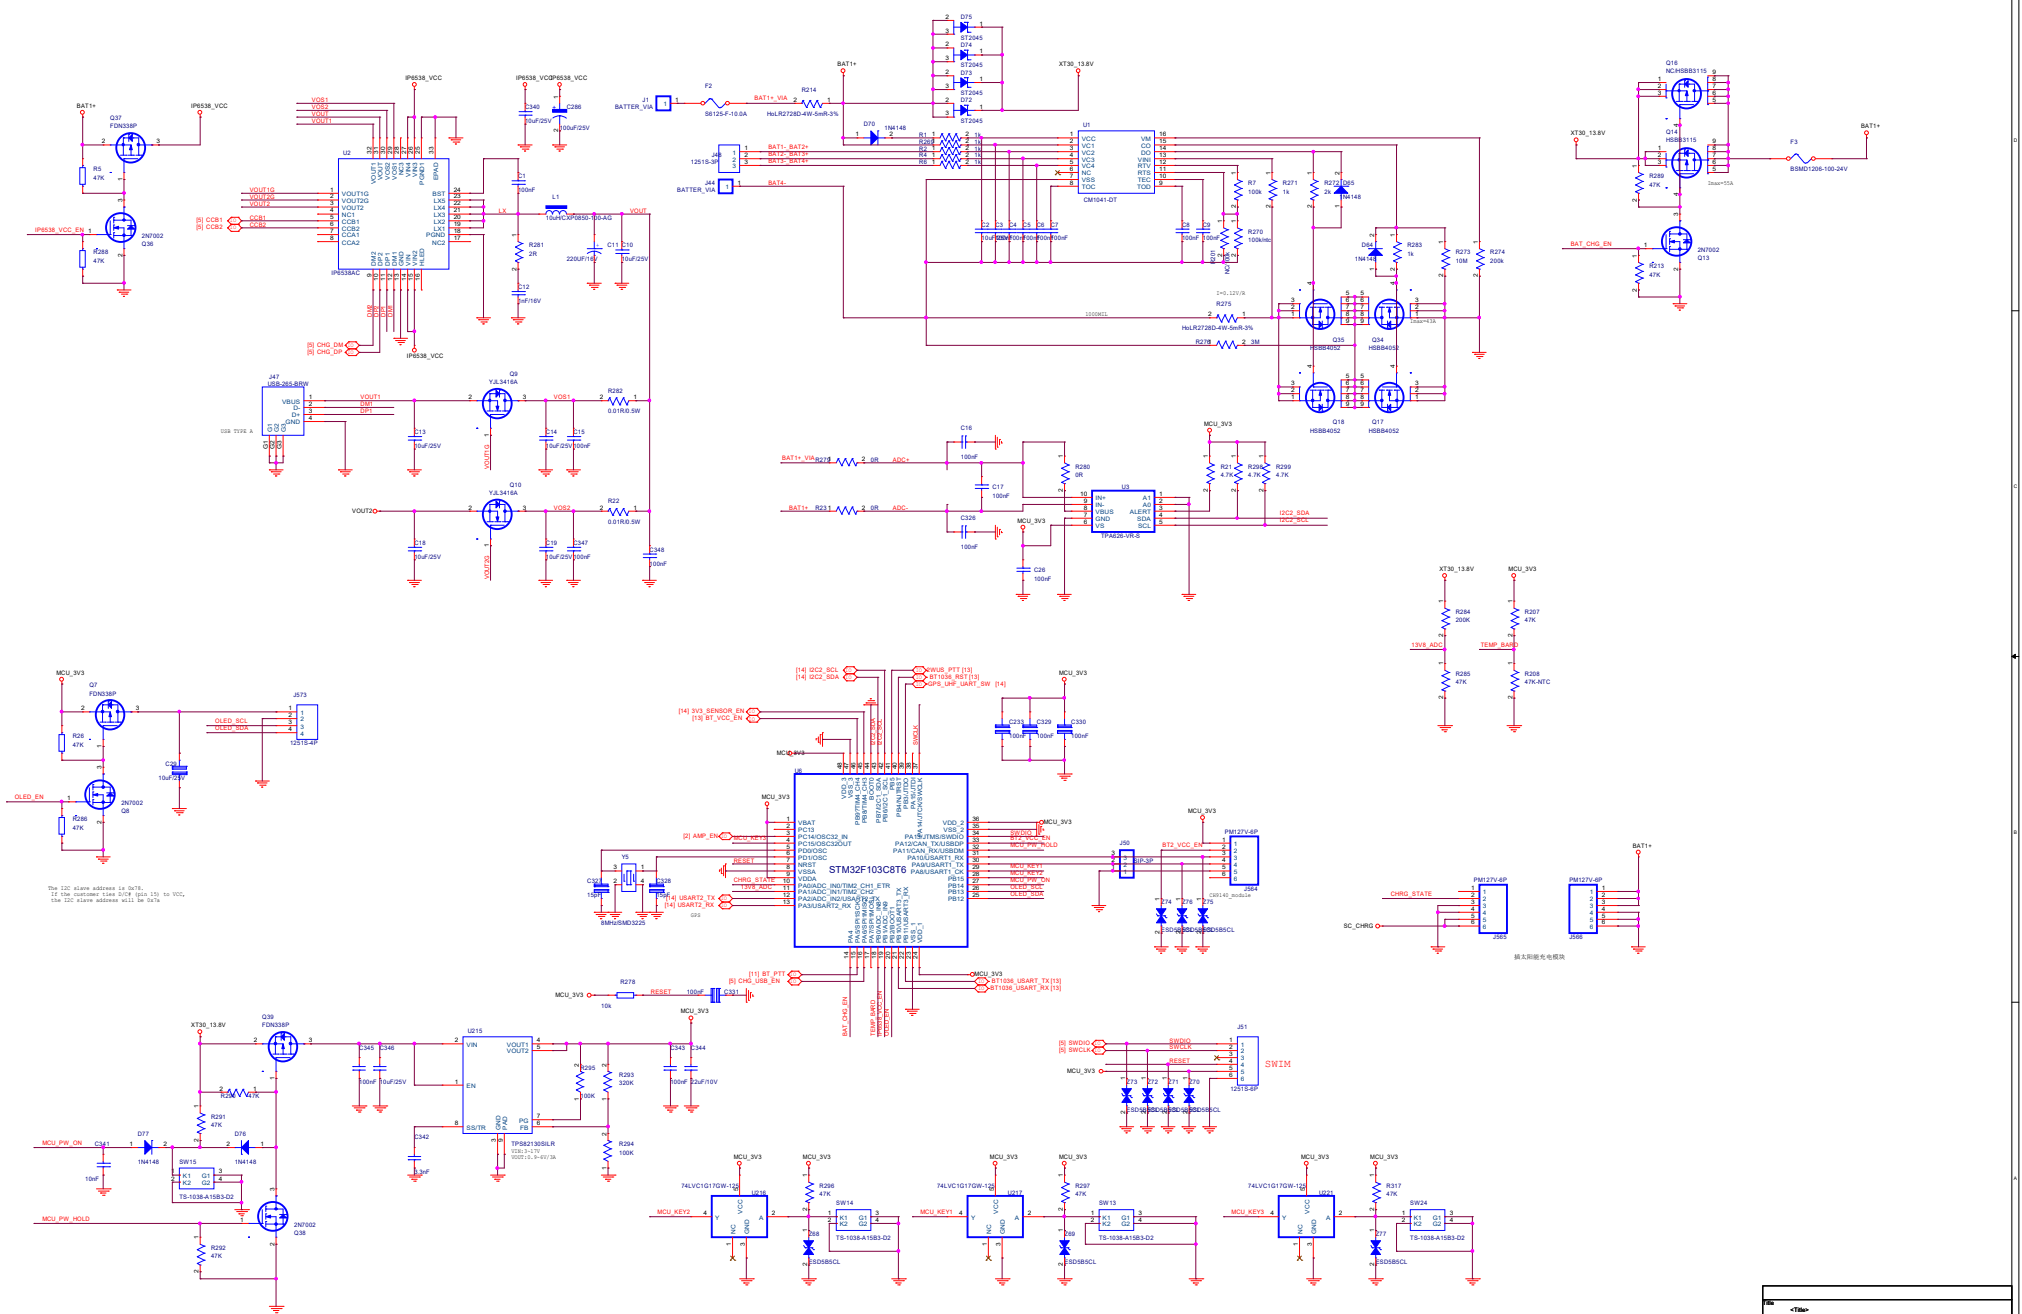

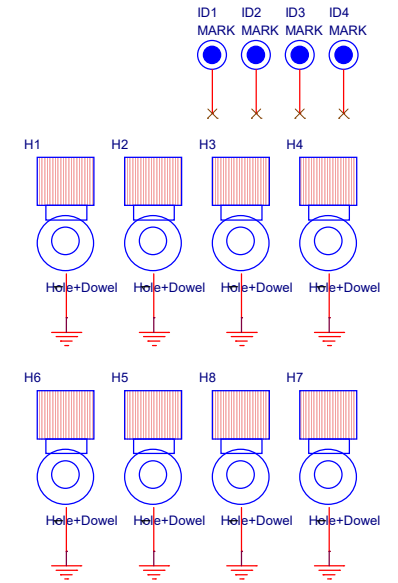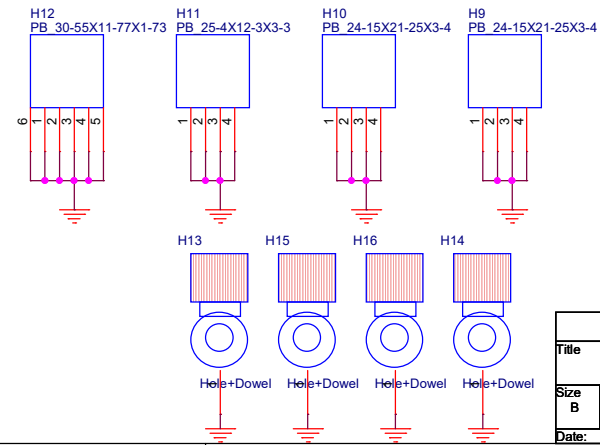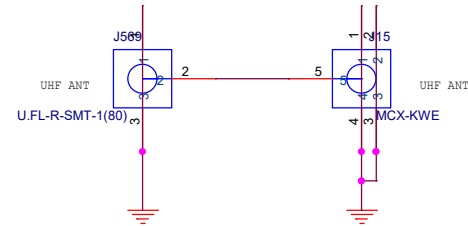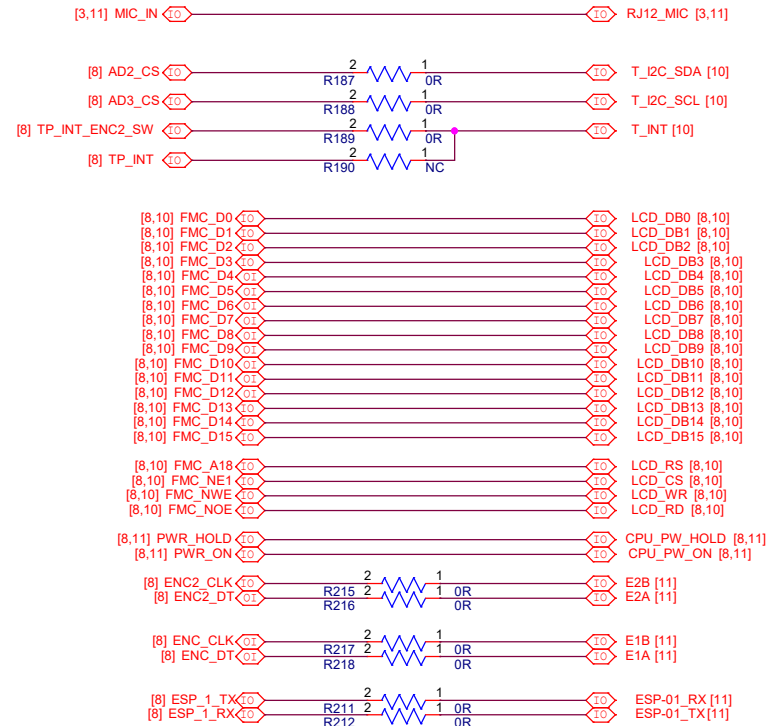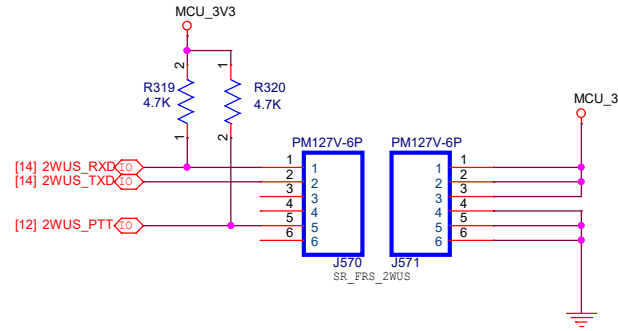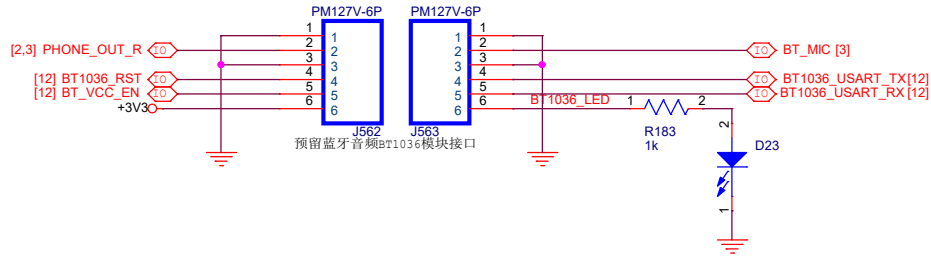


Title			<Title>
Size	Document Number	Rev	
B	<Doc>	<RevCode>	
Date:	Sunday, April 14, 2024	Sheet	13 of 16

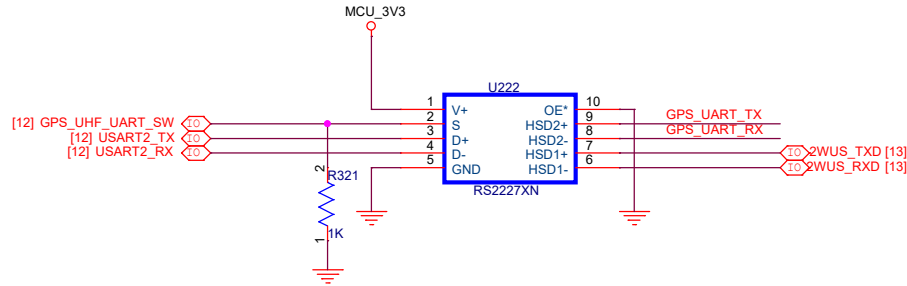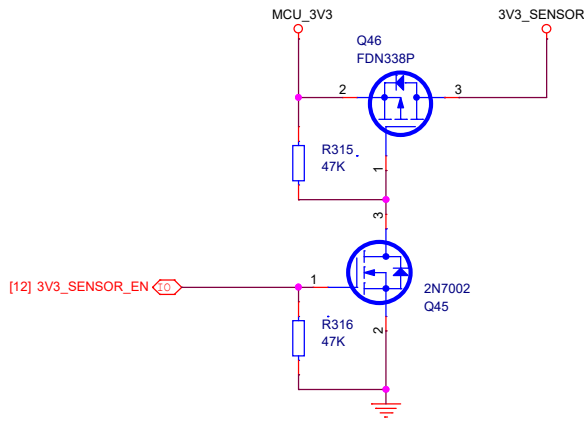

FUNCTION TABLE

OE	S	HSD1+, HSD1-	HSD2+, HSD2-
0	0	ON	OFF
0	1	OFF	ON
1	X	OFF	OFF

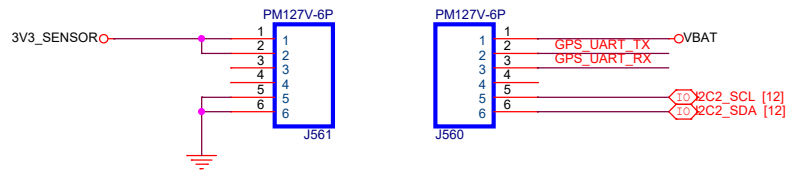

GPS+BDS  
PRESSURE SENSOR

Title			<Title>
Size	Document Number		Rev
B	<Doc>		<RevCode>
Date:	Sunday, April 14, 2024		Sheet 14 of 16