


BleParser::handle\_raw\_data

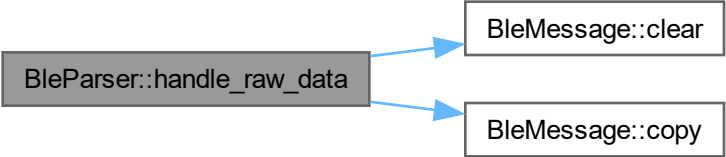

```
graph LR; A[BleParser::handle_raw_data] --> B[BleMessage::clear]; A --> C[BleMessage::copy];
```

The diagram illustrates a function call sequence. A gray rectangular box on the left contains the text 'BleParser::handle\_raw\_data'. Two blue arrows originate from the right side of this box. The top arrow points to a white rectangular box containing 'BleMessage::clear'. The bottom arrow points to another white rectangular box containing 'BleMessage::copy'. All boxes have a thin black border.

BleMessage::clear

BleMessage::copy